

Directional Panel, 350-2700MHz, SISO, 5~9dBi


- Wideband frequency range: 350-2700MHz
- Excellent PIM, -153dBc guaranteed
- Connector options: N(f) and 4.3-10(f)




| Electrical | | | |
|-------------------------------|--------------------|---------|-----------|
| Frequency Band, MHz | 350-470 | 698-960 | 1695-2690 |
| Horizontal Beamwidth, degrees | 95 | 72 | 50 |
| Vertical Beamwidth, degrees | 60 | 45 | 55 |
| Gain, dBi | 5.0 | 7.0 | 9 |
| VSWR | 1.8 | | |
| 3rd Order IMD @ 2 × 43dBm | -153 | | |
| Impedance | 50 ohm | | |
| Polarization | Vertical | | |
| Mechanical | | | |
| Application | Indoor | | |
| Mount Type | Wall mount | | |
| Number of Ports, all types | 1 | | |
| Radome Color | Grey | | |
| Radome material | Fiberglass | | |
| Dimensions, L x W x D, mm | 330*330*90 | | |
| Operating Temperature | -40 ° C to +60 ° C | | |
| Relative Humidity | Up to 100% | | |
| RoHS | Compliant | | |




Patterns



350M




900M

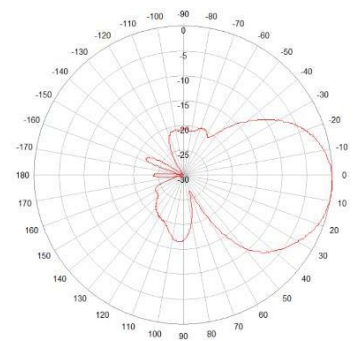


2500M


Azimuth



350M



900M

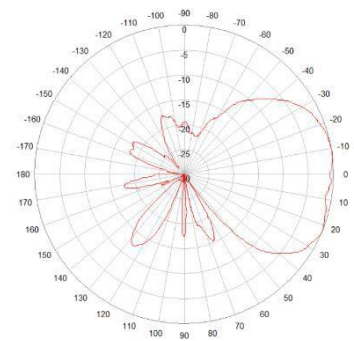

2500M

Elevation