



Omnidirectional, 617-6000MHz, 4x4MIMO, Ultra-slim

- Ultra-wide band: 617-6000MHz
- Excellent PIM
- Low visual impact
- 4x4 MIMO application
- Connector options: 4.3-10 Female or N(f)



Product Specifications:

Electrical					
Frequency Band, MHz	617-698	698-960	1695-2700	3300-4200	4900-6000
Horizontal Beamwidth, degrees	360				
Gain, dBi	3.3	4.5	4.3	6.3	5.5
VSWR	1.7				
Isolation, port to port, dB	16	16	20	30	30
PIM 3 rd , @ 2*20W, dBc	-153				
Impedance	50 ohm				
Maximum Power, Watts	50				
Polarization	Linear, Horizontal				

Mechanical	
Mounting Type	Thru-hole ceiling mount
Number of Ports, all types	4 x 4.3-10 Female
Radome Color	White
Radome Material	ABS
Net size, Diameter*Height	359mm x 23mm
Operating Temperature	-40 °C to +60 °C
Relative Humidity	0 to 100%


*This antenna is not suitable for installing on metal ceiling.




Patterns

Horizontal


Vertical

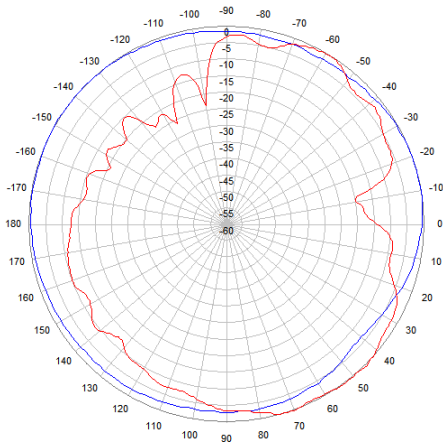


900MHz

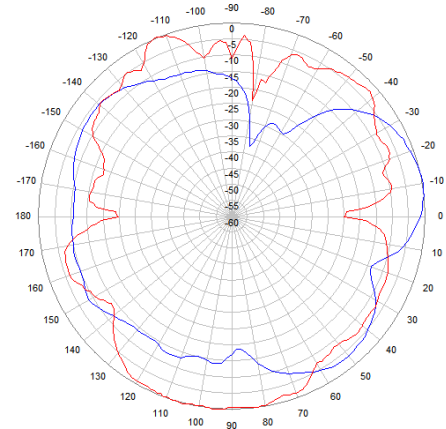

2000MHz

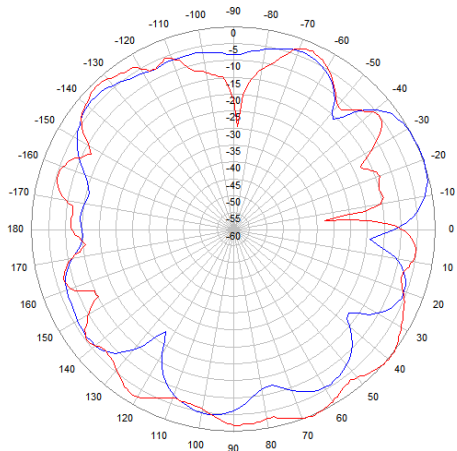

3500MHz

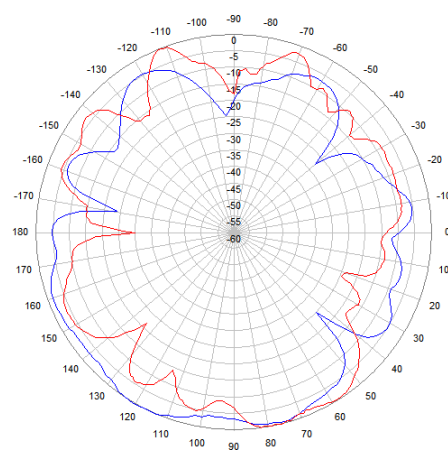

5500MHz