



Omnidirectional, 698-4000MHz, SISO, Ultra-slim, Rectangle

- Ultra-wide band: 698-4000MHz
- Excellent PIM
- Ultrathin, low visual impact
- Connector options: 4.3-10 Female or N Female



Product Specifications:

Electrical					
Frequency Band, MHz	698-806	806-960	1350-1710	1710-2700	3400-4000
Horizontal Beamwidth, degrees	360				
Gain, Ave., dBi	4.3	4.7	6.5	5.2	4.7
VSWR/Return Loss, dB	1.5/14	1.5/14	1.6/12.7	1.5/14	1.5/14
PIM 3 rd @ 2x43dBm, dBc	-153				
Impedance, Ohm	50				
Polarization	V				
Maximum input power, watts	50				

Mechanical	
Mounting Type	Thru-hole ceiling mount
Number of Ports, all types	1 * 4.3-10 Female with 300mm pigtail
Radome Color	White
Radome Material	ABS
Net size, Length*Width*Height	175*150*15 mm
Net weight, kg	0.2
Operating Temperature	-40 °C to +60 °C (-40 °F to +140 °F)
Relative Humidity	0 to 100%


*This antenna is not suitable for installing on metal ceiling




Patterns

Horizontal


Vertical

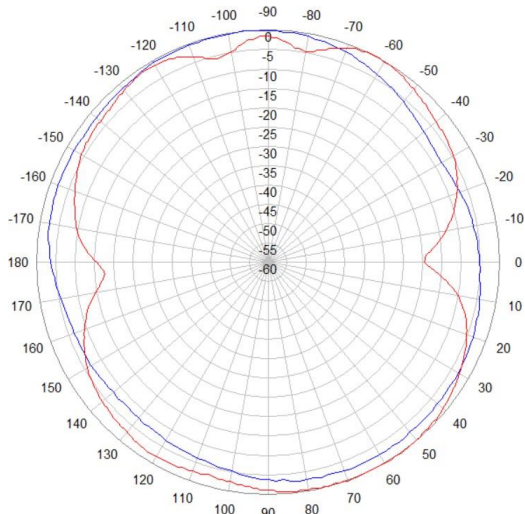

800MHz

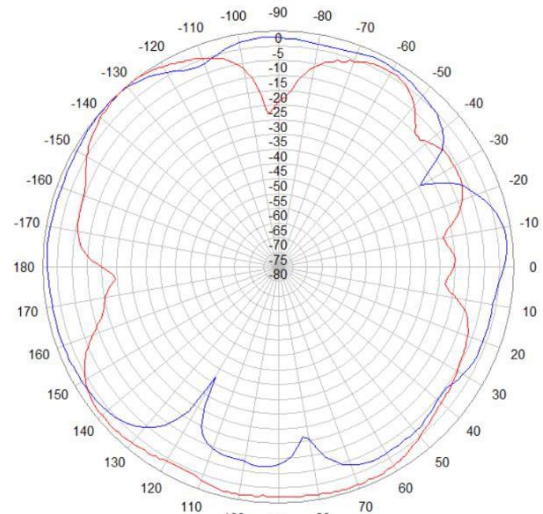

2200MHz

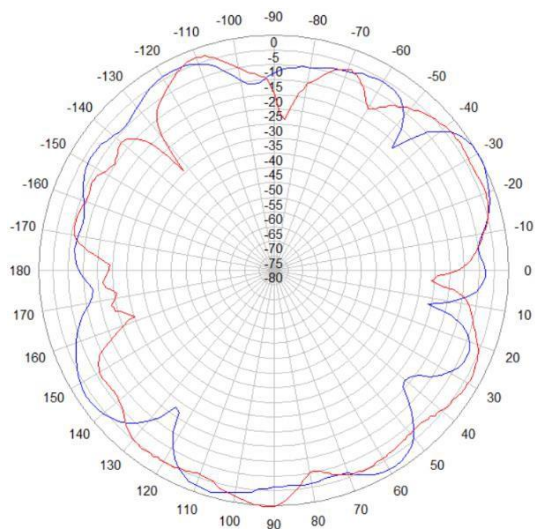

3500MHz