



Omnidirectional, 1695-6000MHz, 2x2MIMO, Ultra-slim

- Wideband frequency range: 1695-6000MHz
- 2x2 MIMO application
- Ultra-thin design
- Connector options: N(f) and 4.3-10(f)




Electrical			
Frequency Band, MHz	1695-2700	3300-4200	4800-6000
Horizontal Beamwidth, degrees	360		
Gain, dBi	4.5	6	5.5
VSWR	1.8		
Isolation, dB	17	24	
3rd Order IMD @ 2 × 43dBm, dBc	-153		
Impedance	50 ohm		
Polarization	Linear		
Mechanical			
Application	Indoor		
Mount Type	Thru-hole ceiling mount		
Number of Ports, all types	2		
Radome Color	White		
Radome material	ABS		
Dimensions	Diameter 210 * Height 14mm		
Operating Temperature	-40 ° C to +60 ° C		
Relative Humidity	Up to 100%		
RoHS	Compliant		

*This antenna is not suitable for installing on metal ceiling.




Patterns

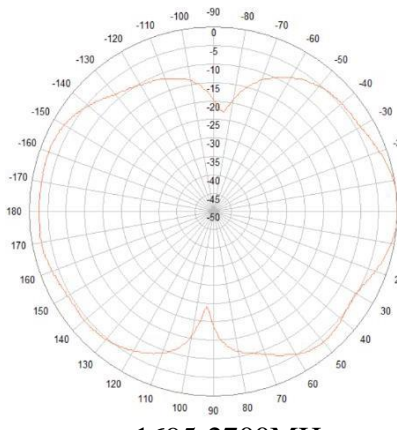


1695-2700MHz

6000MHz

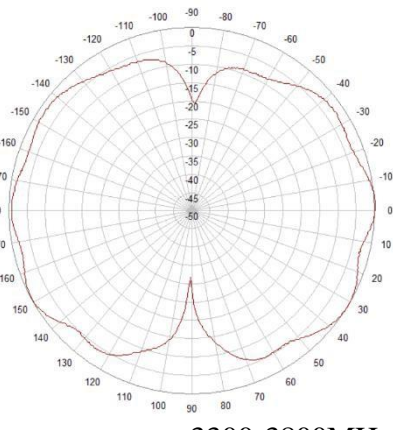


3300-3800MHz

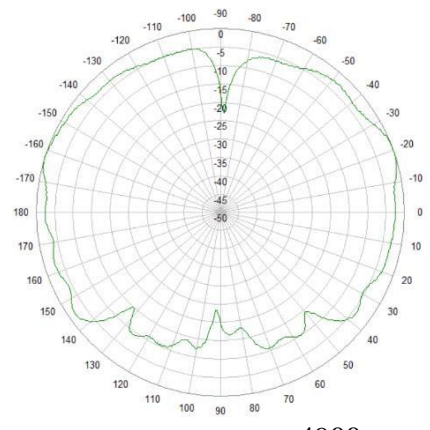


4900-6000MHz


Horizontal patterns

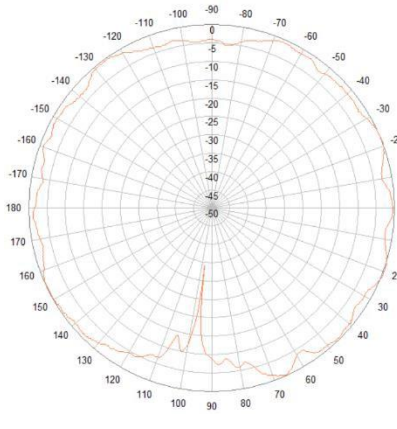

1695-2700MHz

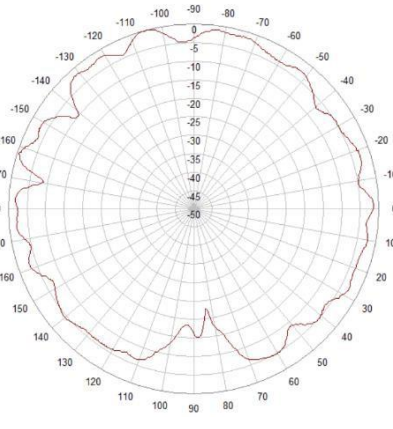

3300-3800MHz

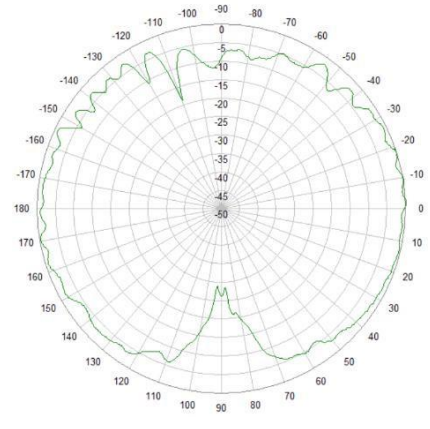

4900-6000MHz

Vertical patterns