

Omnidirectional, 350-6000MHz, SISO, Ultra-slim

- Wideband frequency range: 350-6000MHz
- Excellent PIM
- Ultra-slim and light weight
- Connector options: N(f) and 4.3-10(f)



Product Specifications:

Electrical						
Frequency Band, MHz	350-380	380-520	617-960	1695-2700	3300-4200	4900-6000
Horizontal Beam-width	360					
Gain, dBi	3.0	3.5	4.5	4.0	4.5	6.5
VSWR	≤2.3	≤2.0	≤1.8			
3rd Order IMD @ 2 × 43dBm	-153 dBc					
Impedance	50 ohm					
Polarization	Linear, H					
Mechanical						
Application	Indoor					
Mount Type	Thru-hole ceiling mount					
Number of Ports, all types	1 x 4.3-10(f)					
Radome Color	White					
Radome material	ABS					
Dimensions,mm	259 * 259 * 18					
Operating Temperature	-40 ° C to +60 ° C					
Relative Humidity	Up to 100%					
RoHS	Compliant					


Note: This antenna is not suitable for installing on metal ceiling.




Patterns

Horizontal Patterns


Vertical Patterns

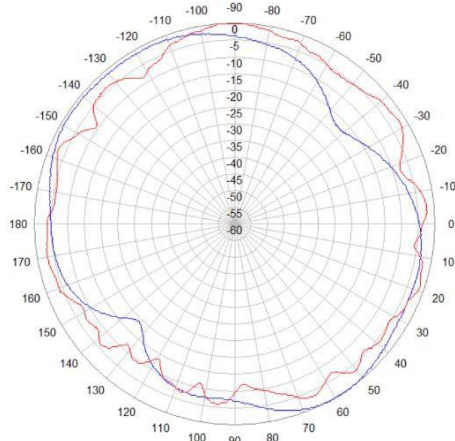


800MHz

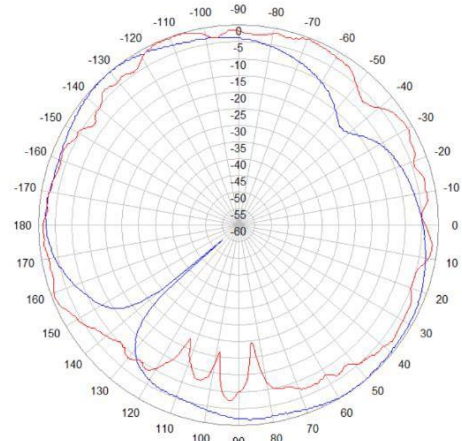

2100MHz

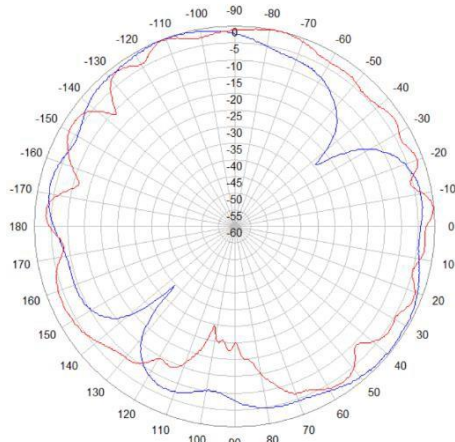

3500MHz

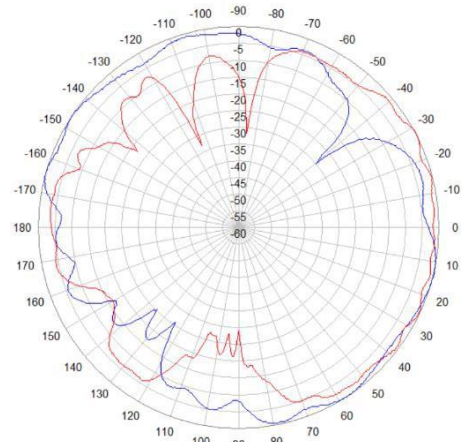

5500MHz