

Single Band Cylinder 2x1710-2690 20dBi, 1 beam, 30-degree Antenna

### Electrical Specifications


Frequency range (MHz)	2x1710-2690	
	1710-2200	2200-2690
Polarization	±45	
Gain (dBi)	15 ±1	17 ±1
Sidelobe Suppression (dB)	13	13
Horizontal Plane 3dB Beamwidth (°)	28±4	23±3
Horizontal Plane 10dB Beamwidth (°)	47±5	39±3
Vertical Plane 3dB Beamwidth (°)	26±4	23±3
Vertical Plane 10dB Beamwidth (°)	46±5	39±4
Horizontal beam centers (°)	0	
Beam Quantity	1	
VSWR	≤1.5	
Isolation Between Polarization (dB)	≥25	
Front to Back Ratio (dB)	≥25	
Intermodulation IM3 dBc (2x43dBm)	≤-150	
Power Rating (W)	4 x 180W	
Input Impedance (Ω)	50	
Lighting Protection	DC Ground	




### Mechanical Specifications

Radome Material	UPVC
Connector Type and Location	4.3-10 Female x4 Bottom
Mechanical Downtilt (°)	0-20
Dimensions, HxWxD (mm)	744×400×400
Packing Size (mm)	970×515×515
Net Weight (Kg)	10.6
Gross Weight (Kg)	17
Clip Weight (Kg)	2.8
Max. Wind Velocity(m/s)	55
Mounting hardware Diameter (mm)	Φ 40 mm ~ Φ 114 mm
Operational Temperature(°C)	-40 to +70
Operational Humidity (%)	<95

Radiation Pattern (1710 -2690 MHz)

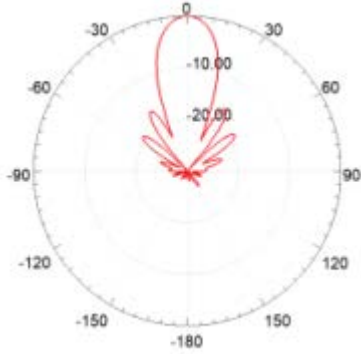

Horizontal Pattern

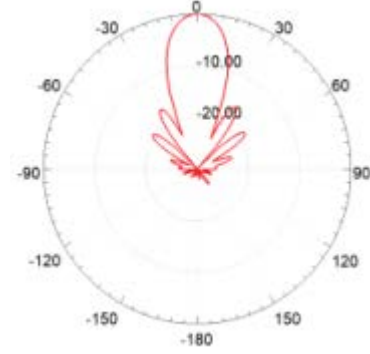

Vertical Pattern